




Applications



Wire Fencing

Design and Performance

Load Rating

- 400 kg | 880 lbs


Material

- Gripple housing: Zinc (ZA2)
- Spring: Stainless steel
- End cap: UV Stabilized PP
- Ceramic wedge: Ceramic (Sintox)

Compatibility

- Wire type: High tensile barbed wire
- Wire range: 2 x 1.57 mm - 2.00 mm
- Standard wire gauge: 2 x 15.5 swg - 2 x 14 swg

Dimensions and Weights

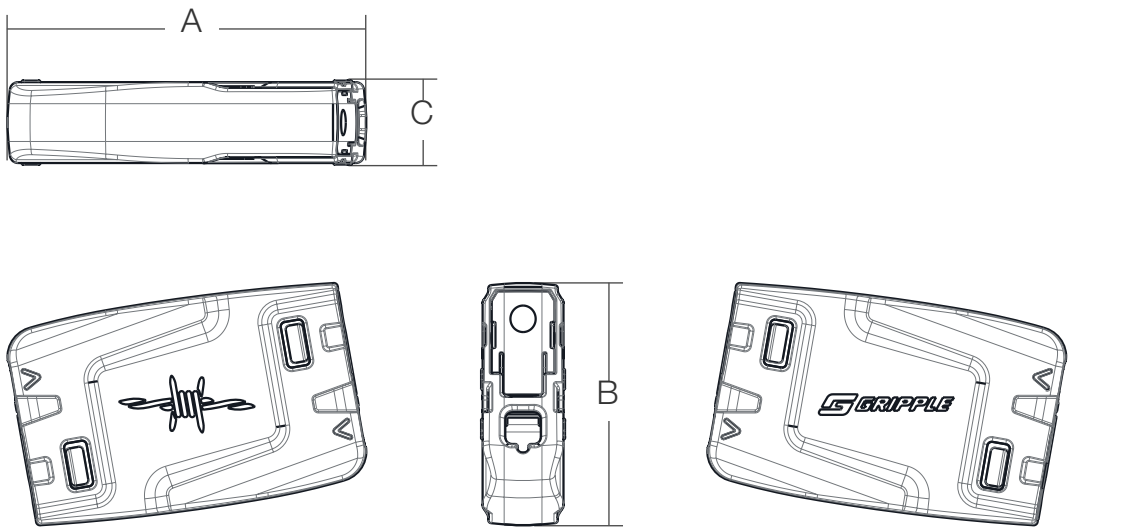

A Length	45 mm 1.8 in
B Height	32 mm 1.3 in
C Depth	11 mm 0.4 in

Packaging

Item weight	45 g 0.1 lbs
Bag quantity	20
Package weight (bag)	0.9 kg 2.0 lbs
Box quantity (no. bags)	7
Package weight (box)	6.44 kg 14.2 lbs

Installation



Cut wire at the barb, leaving at least 8 cm | 3 inches of wire to make the join, make sure the end of the wire is tightly wound.



Insert the first barbed wire into the wire joiner ensuring it is tight against the barb.



Insert the second wire repeating step 2 and tension from the end post.