




Barbed Range

Joiners For Barbed Wire

“A real game changer for barbed wire”

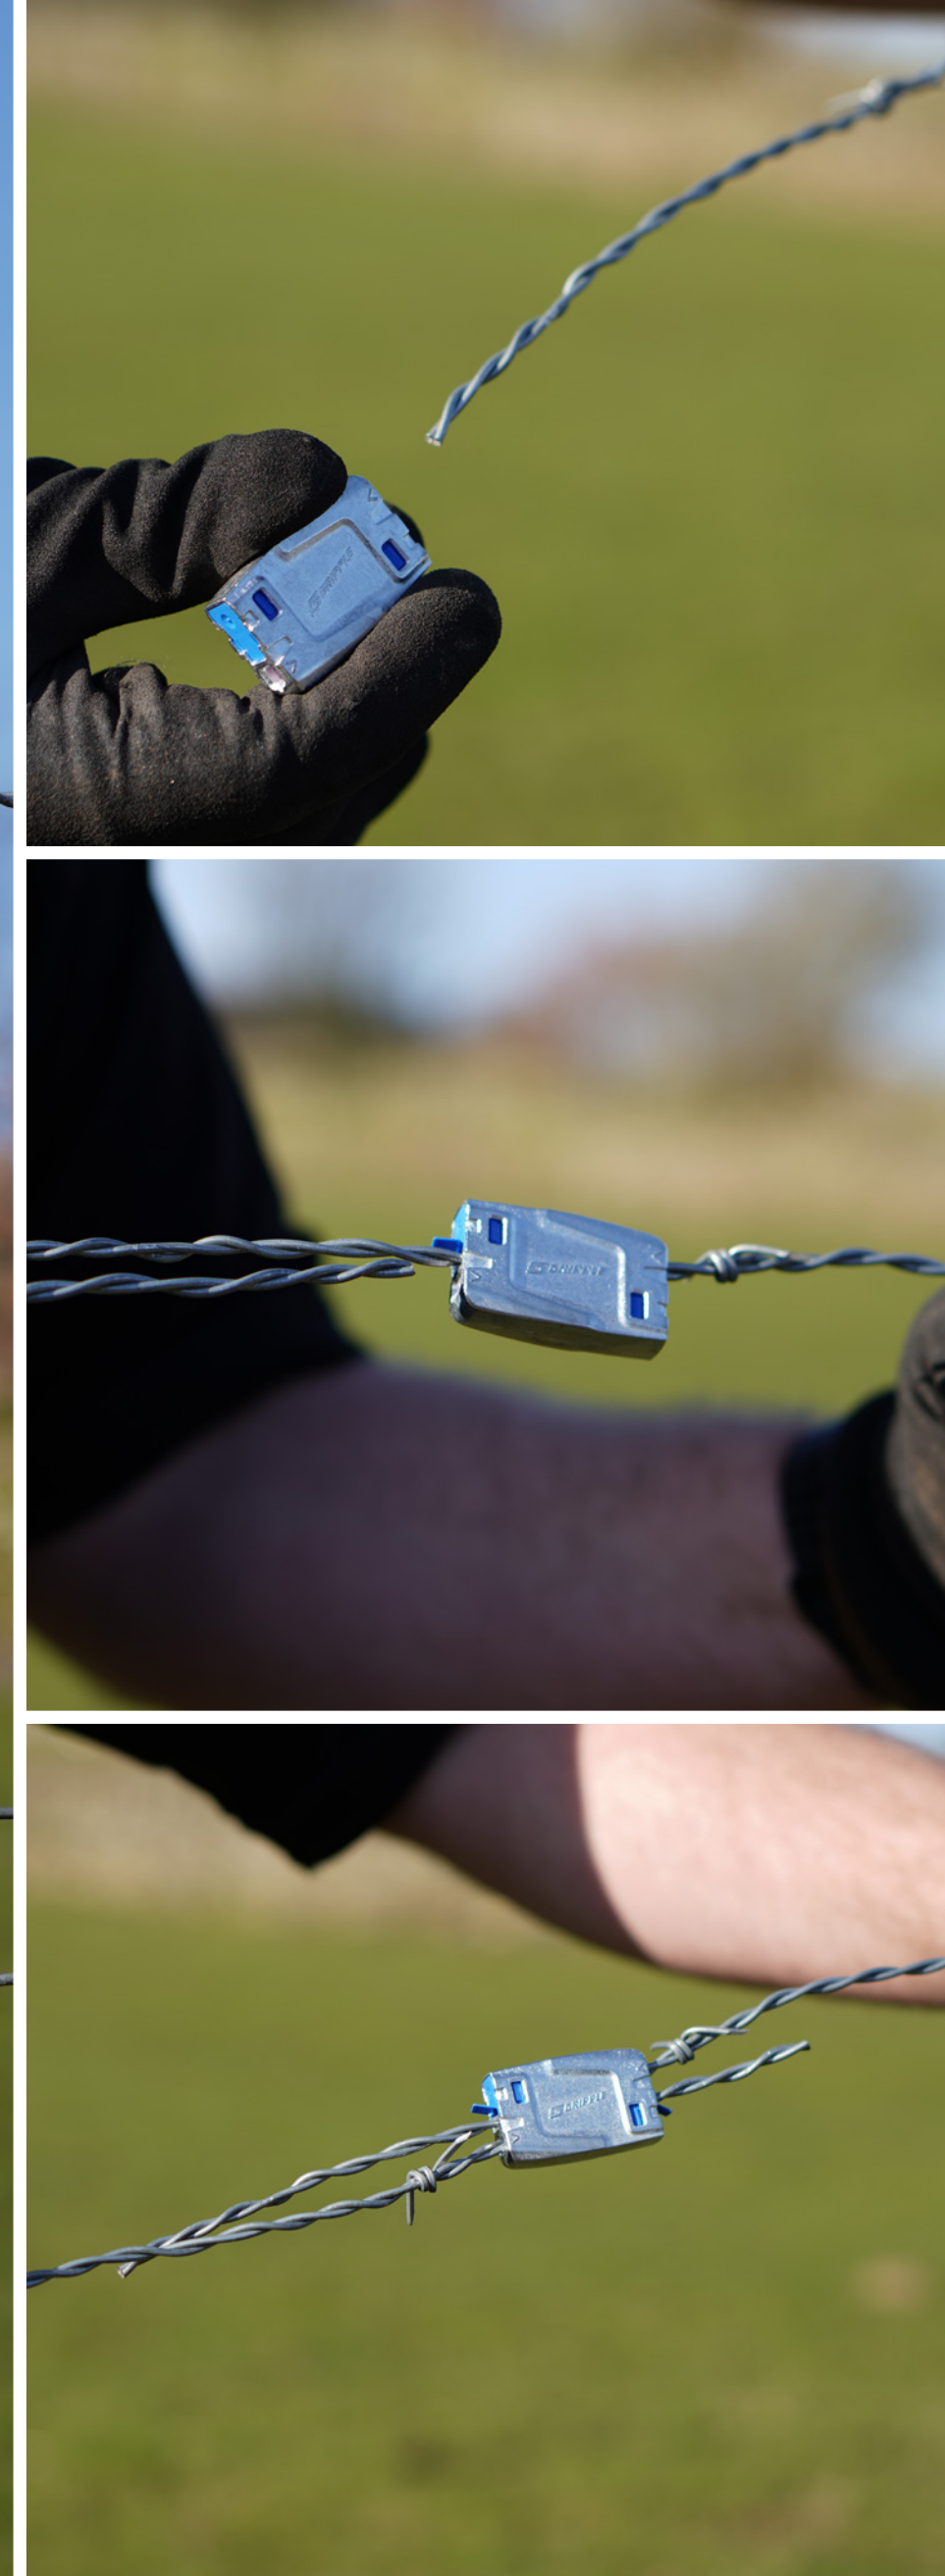

Let's face it barbed wire isn't designed to be tied!

Gloves or no gloves, it isn't easy and is probably going to hurt. But what other options do you have when your fence needs joining or repairing, right?

Well, at Gripple we have developed a range of wire joiners specifically for use with barbed wire. Whether you are working with mild steel or high tensile wire, we have a wire joiner which is easy to install, long lasting and reliable.

Developed applying 30+ years of tried and tested wire joining technology, our barbed wire joiners have been specifically designed to grip the unique undulating shape of barbed wire. Thanks to our corrosion resistant ceramic wedges and rollers, they provide a long lasting joint which is secure for the lifetime of your fence.

Available from your local fencing and agricultural retailers, both fencing contractors and farmers alike love how easy these wire joiners are to use both installing and repairing barbed wire.

Easy to use

No more tying knots

Fast to install

Join or repair barbed wire in seconds

Long lasting

Made from corrosion resistant materials,
designed to outlast your fence

Compatible

A range of joiners for mild steel and high
tensile barbed wire



Barbed High Tensile

High Tensile Barbed Wire Joiner

Load Rating
400 kg / 880 lbs

Wire Range
1.57 mm / 1.80 mm / 2.00 mm

Standard Wire Gauge
15.5 ga / 14 ga



Barbed Mild Steel

Mild Steel Barbed Wire Joiner

Load Rating
150 kg / 330 lbs

Wire Range
2 x 2.00 mm - 2 x 2.50 mm

Standard Wire Gauge
2 x 14 swg - 2 x 12½ swg

Easy to install	Join or repair high tensile barbed wire in seconds with audible engagement for added confidence
Compatible	Use with 1.57 mm to 2 mm (15.5 ga to 14 ga wire)
Stronger than a traditional knot	16% stronger than a traditional wire knot
Long lasting	Made from corrosion resistant materials, designed to outlast your fence
Designed for high tensile wire	Patented technology specifically designed for use with high tensile barbed wire

Easy to install	Join or repair mild steel barbed wire in seconds
Compatible	Use with 2 x 2.00 mm - 2 x 2.50 mm (2 x 14 swg - 2 x 12½ swg)
Long lasting	High grade ceramic roller for corrosion resistance
Designed for mild steel wire	Designed for use with mild steel barbed wire



Barbed Mild Steel

Sub-tools & Accessories



Large Wire Cutters

Suitable for cutting high tensile wire or wire rope up 6 mm (1/4 in) diameter.



Small Wire Cutters

Suitable for cutting high tensile wire or wire rope up 4 mm (3/16 in) diameter.